


FLEXIBLE LEAD SOLAR FLASHINGS

WHEN PROPERLY INSTALLED, THE “SF” SERIES SOLAR FLASHING WILL LAST THE LIFE OF ANY ROOFING SYSTEM!

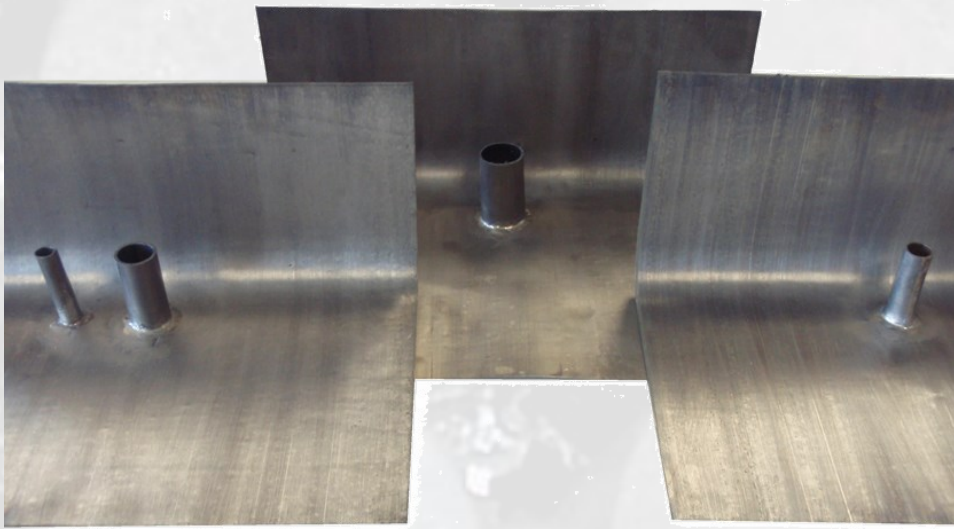

Mayco’s **SOLAR FLASHINGS** are made from the highest quality and longest life materials. This is an all-lead flashing.

Made to meet federal, state, city and county specifications. The standard solar flashing consists of a cylindrical (tube) riser where a steel reinforced boot is not required.

Standard solar flashings are available in 2.5# lead on a 12” x 12” base with a 2” tall riser. Some models of the “SF” series solar flashings also have an extra 3/8” ID riser to accommodate sensor wire(s). 4# Lead available as needed.

Other base sizes and riser heights available upon request. “SF” series solar flashings can also be made pre-cut to a pitch if required, although most solar applications are 90-degrees to the roof (flat pitch).

Safety:

For information on lead safety in the workplace please refer to OSHA Title 29 CFR 1910.1025.